



PMA Series



PICOQUANT

Photomultiplier Detector Assembly

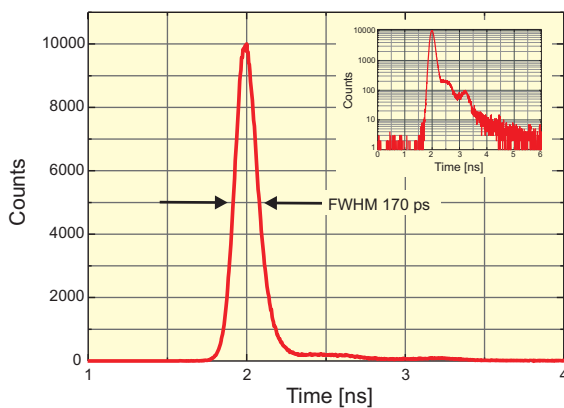

- Instrument response < 180 ps (FWHM)
- Internal GHz pre-amplifier & shutter
- Optional thermo-electric cooling
- Simple 12 V DC power supply, no HV supply required
- Spectral ranges from 185 to 920 nm
- RF and magnetic shielding with gold plated iron or nickel coated aluminum housing



Applications

- Steady-state and time-resolved fluorescence and luminescence spectroscopy
- Ultra sensitive analysis
- Fluorescence microscopy
- General purpose photon counting and low light level detection

Photomultiplier Detector Assembly

The PMA detector is a single photon sensitive, fully integrated, fast time response and low noise photon sensor from PicoQuant. The PMA integrates a fast Photomultiplier Tube (PMT), a high voltage power supply and pre-amplifier. For selected models thermo-electric cooling and automatic overload protection are available as an option.


These devices are built in a gold plated iron or nickel coated aluminum housing to achieve high level of RF and magnetic shielding and protection against the interference with other devices. The built-in pre-amplifier is specially targeted at timing sensitive applications such as Time-Correlated Single Photon Counting (TCSPC).

Various photocathodes can be incorporated into the PMA to meet user's needs. Three different cathode versions are available. A blue sensitive, low dark count version with very high detection efficiency covers the spectral range from 230 nm to 700 nm. The standard unit is sensitive in the range from 185 nm to 820 nm and an extended red sensitive cathode covers the 230 nm to 920 nm range. A thermo-electrically cooled housing is available to reduce the dark count rate (recommended for red sensitive versions).


The housing is available in three different versions. The OEM design contains no safety shutter. Standard PMA-M features a security shutter, which can be interlocked with e.g. a sample chamber lid. Cooled versions (PMA-C Series) incorporate in addition an automatic overload detection function that closes the shutter in case of over-illumination.

Signal output for all models is a standard 50 Ohms SMA connector. The module only needs a 12 V DC supply line, which is delivered already with the PMA unit.

Spectral response

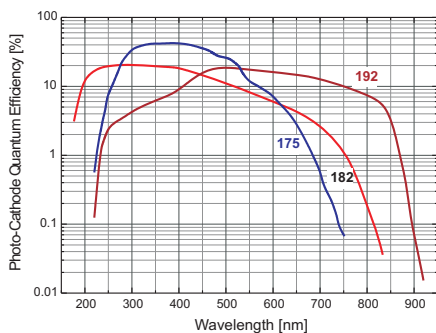

Naming

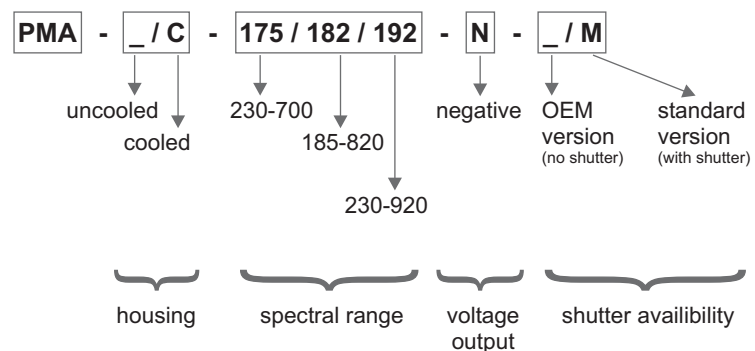

Specifications

Electrical Parameters	PMA 175	PMA 182	PMA 192
Wavelength range	230-700 nm	185-820 nm	230-920 nm
Dark counts* (uncooled)	< 50 cps	< 900 cps	< 10000 cps**
Dark counts* (cooled)	---	< 200 cps	< 3000 cps**
Transit time spread (FWHM, typ. value)	< 180 ps		
Recommended max. count rate	5 MHz		
Single electron response width	1.5 ns		
Pulse rise / fall time	750 ps		
Signal Output			
Connector	SMA female		
Impedance	50 Ohms		
Polarity	negative		
Power Supply			
Input	12 V DC		
Max. current consumption (uncooled)	200 mA		
Max. current consumption (cooled)	450 mA		
Dimensions			
Uncooled (w × d × h)	OEM version 134 × 84 × 34 mm	PMA versions 72 × 84 × 83 mm	
Cooled (w × d × h)	---	120 × 84 × 110 mm	
Detector area diameter	8 mm		
* typ. value, at 20 °C ambient temperature			
** Lower dark counts might be available on special selection. Please contact us for details.			

Please check our website for updated information.

All Information given here is reliable to our best knowledge. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications and external appearances are subject to change without notice. Trademarks or corporate names are used for explanation and identification, to the owner's benefit and without intent to infringe.

© PicoQuant GmbH, January 2017



PicoQuant GmbH
Rudower Chaussee 29 (IGZ)
12489 Berlin
Germany

Phone +49-(0)30-6392-6929
Telefax +49-(0)30-6392-6561
Email info@picoquant.com
WWW http://www.picoquant.com